Edition 2012-2013

MADE IN ITALY

TerMac

Road Marking Solutions

INDEX

Communication and development.....4

Equipment for spray plastic.....5-11

Self propelled equipment for cold paint.....12-20

Universal equipment.....21-29

Self propelled equipment for airless.....30

Truck-mounted equipment for airless.....31

Truck-mounted equipment for cold paint.....32-33

Equipment for two components.....34-35

Self propelled equipment for thermplastic screed.....36-37

Accessories data.....38-44

Extruder 10-12-15-25-50 cm
for thermoplastic material truck-mounted and self propelled.....45

INDEX

Platform for truck.....46

List of accessories.....47-52

Preheater for thermoplastic material.....53

Special accessories.....54

Communication and development

For the company TerMac has always been important the communication factor; that's why the investement in exhibitions, customers' demonstration and the continuous publication of novelties in the sector and the development in the most important road magazines, is one of the most important point of this company, that has never stopped to invest over the years.
The countinuos demands by the roadsigns materials' producers and by the applicators, could often be considered veritable projects to develop and in most cases these "customized" equipments become mass production.





TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic

MT 250 (Truck-mounted equipment)

Equipment truck-mounted for spray plastic, with capacity of 250 litres.
(Thermoplastic tank not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 400 kg of laid down material per working day. The use of the MT series reduces down time, heating and preparation times of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive made completely by TerMac RMS, that feeds an electrical circuit, in compliance with EC regulations, and a hydraulic circuit, avoiding therefore the use of others generators.

Donkey-engine: 33 HP diesel, liquid-cooled.
Compressor: 1350 l/m at 7 bar.
Heating system: powered by a 220 V burner and hydraulic pump for circulating oil in the circuit.
Material tank: no.01 with approximately 250 l capacity heated by diathermic oil and equipped with hydraulic agitator.
Glass beads tank: no.01 with 250 l capacity under pressure.
Spraying group: no.01 on the right and no.01 on the left.
Pneumatic spray gun: no.02 heated by diathermic oil.
Pneumatic gun for beads glass: no.02
Thermoplastic pump: no.01, with capacity 60-65 kg/m on the gun exit.
Pointer: folding, poiting system that can be assembled on the right and on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated double driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic

MT 700 (Truck-mounted equipment)

Equipment truck-mounted for spray plastic with capacity of 437 litres. (Thermoplastic tank not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 14 q of laid down material per working day. The use of MT series reduces downtime, heating and preparation time of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive made completely by TerMac RMS , that feeds an hydraulic and electric circuit, in compliance with EC regulations, avoiding therefore the use of others generators.

Donkey-engine: 50 HP diesel, liquid-cooled.
Compressor: 1350 l/m at 7 bar.
Heating system: powered by a 220 V burner and hydraulic pump for circulating oil in the circuit.
Material tank: no.01 with approximately 437 l capacity heated by diathermic oil and equipped with hydraulic agitator.
Glass beads tank: no.01 with 250 l capacity under pressure.
Spraying group: no.01 on the right and no.01 on the left.
Pneumatic spray gun: no.03 heated by diathermic oil.
Pneumatic gun for beads glass: no.03
Thermoplastic pump: no.01capacity 60-65 kg/m on the gun exit.
Pointer: folding, pointing system that can be assembled on the right and on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated double driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic
MT 1500 (Truck-mounted equipment)

Equipment truck-mounted for spray plastic, with a capacity of 870 litres.
(Thermoplastic tank not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 3 ton of laid down material per working day. The use of MT series reduces downtime, heating and preparation time of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive made completely by TerMac RMS , that feeds an hydraulic, pneumatic and electric circuit, strictly at low voltage 24V in compliance with EC regulations, avoiding therefore the use of others generators.

Donkey-engine: 50 HP diesel, liquid-cooled.
Compressor: 2500 l/m at 7 bar.
Heating system: powered by a diesel oil burner at 24V and hydraulic pump for circulating oil in the circuit.
Material tank: no.01 with approximately 875 l capacity heated by diathermic oil and equipped with hydraulic agitator with heated arms.
Glass beads tank: no.01 with capacity 250 l under pressure.
Spraying group: no.01 on the right and no.01 on the left with hydraulic transfer and pneumatic ascent/descent.
Pneumatic spray gun: no.03 l heated by diathermic oil.
Pneumatic gun for beads glass: no.03
Thermoplastic pump: no.01 capacity 60-65 kg/m on the gun exit.
Pointer: pointing system connected to vehicle steering, that can be folded and assembled on the right or on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated double driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic
MT 3000 (Truck-mounted equipment)

Equipment truck-mounted for spray plastic, with a capacity of 1800 litres. (Thermoplastic tank not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 6 q of laid down material per working day. The use of MT series reduces downtime, heating and preparation time of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive, made completely by TerMac RMS, that feeds an hydraulic, pneumatic and electric circuit, strictly at low voltage of 24V in compliance with EC regulations, avoiding therefore the use of others generators.

Donkey- engine: 50 HP diesel, liquid-cooled.
Compressor: 2500 l/m at 7 bar.
Heating system: powered by a diesel oil burner at 24 V and hydraulic pump for circulating oil in the circuit.
Material tank: no.01 with capacity approximately 1800 l heated by diathermic oil and equipped with hydraulic agitator with heated arms.
Glass beads tank: no.01 with capacity 350 l under pressure.
Spraying group: no.01 on the right and no. 01 on the left with hydraulic transfer and pneumatic ascent/descent.
Pneumatic spray gun: no.03 heated by diathermic oil.
Pneumatic gun for beads glass: no. 03
Thermoplastic pump: no.01 capacity 60-65 kg/m on the gun exit.
Pointer: pointing system connected to vehicle steering, that can be folded and assembled on the right or on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated dual driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic

MT 6000 (Truck-mounted equipment)

Equipment truck-mounted for spray plastic, with no.02 tanks of 1800 litres each. (Thermoplastic tanks not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 6 q of laid down material per working day. The use of MT series reduces down time, heating and preparation time of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive, made completely by TerMac RMS, that feeds an hydraulic, pneumatic and electric circuit, strictly at low voltage of 24V in compliance with EC regulations, avoiding therefore the use of others generators.

Donkey-engine: 80 HP diesel, liquid-cooled.
Compressor: 3800 l/m at 7 bar.
Heating system: powered by a diesel oil burner at 24 V and hydraulic pump for oil circulation in the circuit.
Material tank: no.02 with capacity approximately 1800 l each, heated by diathermic oil and equipped with hydraulic agitator with heated arms.
Glass beads tank: no.02 with capacity 350 l each under pressure.
Spraying group: no.01 on the right and 01 on the left with hydraulic transfer and pneumatic ascent/descent.
Pneumatic spray gun: no.03 heated by diathermic oil.
Pneumatic gun for beads glass: no.03
Thermoplastic pump: no.02 capacity 60-65 kg/m on the gun exit.
Pointer: pointing system connected to vehicle steering, that can be folded and assembled on the right or on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated dual driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic

MT 8000 V (Truck-mounted equipment)

Equipment truck-mounted for spray plastic, with no.02 vertical tanks of 2200 litres each. (Thermoplastic tanks not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 160 q of laid down material per working day. The use of MT series reduces down time, heating and preparation time of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive, made completely by TerMac RMS, that feeds an hydraulic, pneumatic and electric circuit, strictly at low voltage of 24V in compliance with EC regulations, avoiding therefore the use of others generators.

Donkey-engine: 80 HP diesel, liquid-cooled.
Compressor: 3800 l/m at 7 bar.
Heating system: powered by a diesel oil burner at 24 V and hydraulic pump for oil circulation in the circuit.
Material tank: no.02 with capacity approximately 2200 l each, heated by diathermic oil and equipped with hydraulic agitator with heated arms.
Glass beads tank: no.02 with capacity 700 l each under pressure.
Spraying group: no.01 on the right and 01 on the left with hydraulic transfer and pneumatic ascent/descent.
Pneumatic spray gun: no.03 heated by diathermic oil.
Pneumatic gun for beads glass: no.03
Thermoplastic pump: no.02 capacity 60-65 kg/m on the gun exit.
Pointer: pointing system connected to vehicle steering, that can be folded and assembled on the right or on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated dual driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for spray plastic

MT 9000 (Truck-mounted equipment)

Equipment truck-mounted for spray plastic, with no.03 tanks of 1800 litres each. (Thermoplastic tanks not under pressure).

Equipment with exceptional performances both technically and in application, easy to use, able to produce approximately 180 q of laid down material per working day. The use of the MT series reduces downtime, heating and preparation time of the material for the final spraying, thanks to the excellent diathermic oil circulation system. The equipment is perfectly safe to use, with a single motor drive, made completely by TerMac RMS, that feeds an hydraulic and electric circuit, in compliance with EC regulations, avoiding therefore the use of others generators.

Donkey-engine: 80 HP diesel, liquid cooled.
Compressor: 3800 l/m at 7 bar.
Heating system: powered by a 24 V burner and hydraulic pump for oil circulation in the circuit.
Material tank: no.03 with approximately 1800 l capacity heated by diathermic oil and equipped with hydraulic mixer.
Glass beads tank: no.03 with 700 l capacity under pressure.
Spraying group: no.01 on the right and no.01 on the left.
Pneumatic spray gun: no.03 heated by diathermic oil.
Pneumatic gun for beads glass: no.03 .
Thermoplastic pump: no.03 capacity 60-65 kg/m on the gun exit.
Pointer: poiting, folding system that can be assembled on the right and on the left.
Rear panel with arrow (*).
Extruder for plastic flow (*).
Installation of homologated dual driver on industrial vehicle.

A series of optional extras can be assembled on the entire MT range to help improve working.
Our company is versatile, allowing us to equip the vehicle together with customers in order to fulfil the widest range of requirements.

(*) on request

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint Eureka MV 25

Hand-guided road marking machine for small works, ideal for every type of cold paint, (tank under pressure).

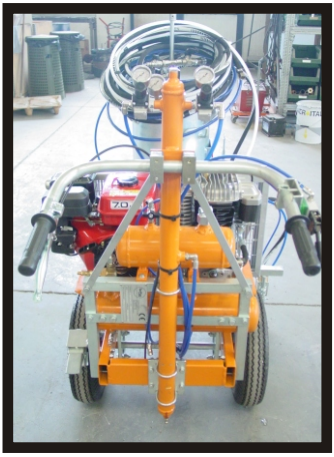

MEASURES:

Lenght:	1100 mm
Width:	700 mm (depending on the equipment)
Weight:	100 Kg - 218 Lbs (depending on the equipment)

Frame: realized in iron with three wheels and adjustable handle.
Engine: petrol engine 6 HP with self-winding pull start.
Compressor: twin-cylinder output air 490 l/min.
Pneumatic gun: with deflector in tungsten carbide and telescope for lines 12-30 cm.
Paint tank: 25 l with manual agitator incorporated, with certificate PED by laws CE.
Front wheel: with revolving system and mechanical locking to correct the direction of machine and for works in small places.
Break: service brake on rear wheels.
Solvent tank: 2,5 l to clean guns and pipes.

Accessories on demand:

Mechanical system for broken line
Group discs
Kit spread bead glasses 15 l
Kit spread bead glasses 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pneumatic pump
Manual bead gun
Pneumatic bead gun
Manual paint gun

Inox tank for second colour
Gun support with wheel
Gun support with pneumatic wheel lift

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint Eureka MV 50

Road marking machine self-propelled with rear wheels drive, ideal for every type of cold paint (tank under pressure).

MEASURES:

Lenght:	1760 mm
Width:	900 mm (depending on the equipment)
Weight:	150 Kg - 327 Lbs (depending on the equipment)

Frame:realized in iron with three wheels.
Engine: petrol engine 8.5 HP with self-winding pull start and centrifugal clutch.
Traction: hydraulic on rear wheels.
Compressor: twin-cylinder, output air 490 lt/m'.
Pneumatic gun:with deflector in tungsten carbide and telescope for lines 12-30 cm.
Paint tank: 50 l with manual mixer incorporated, with certificate PED by laws CE.
Front wheel: with revolving system and mechanical locking to correct the direction of the machine and for works in small places.
Break: service brake on rear wheels.
Solvent tank: 2,5 l to clean guns and pipes.

Accesories on demand:

Mechanical system for broken line
Group discs
Kit spread bead glasses 15 l
Kit spread bead glasses 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pneumatic pump
Manual bead gun
Pneumatic bead gun
Manual paint gun
Inox tank for second colour
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for operator
Programmer
Working light
Blitz

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint MVS 75 ds

Road marking self-propelled machine with rear wheels drive, ideal for every type of cold paint (tank under pressure).

MEASURES:

Lenght:	1000 mm
Width:	750 mm (depending on the equipment)
Weight:	140 Kg - 305,2 Lbs (depending on the equipment)

Frame: realized in iron with three wheels and adjustable handle.
Engine: petrol engine 8.5 HP with self-winding pull start and centrifugal clutch.
Drive: hydraulic, on rear wheels.
Compressor: twin-cylinder, output air 490 l/min.
Pneumatic gun:with deflector in tungsten carbide and telescope for lines 12-30 cm.
Paint tank: 50 l with manual agitator incorporated, with certificate PED by laws CE.
Front wheel: with revolving system and mechanical locking to correct the direction of machine and for works in small places.
Break: service brake on rear wheels.
Solvent tank: 2,5 l to clean guns and pipes.

Accessories on demand:

Mechanical system for broken lines
Group discs
Kit spread bead glasses15 l
Kit spread bead glasses 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pneumatic pump
Manual bead gun
Pneumatic bead gun
Manual paint gun

Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for operator
Programmer
Working light
Blitz

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint MVS 75 tr

Road marking self-propelled machine with roller drive, ideal for every type of cold paint (tank under pressure).



MEASURES:

Lenght: 1000 mm
Width: 750 mm (depending on the equipment)
Weight: 120 Kg-261.6 Lbs (depending on the equipment)

Frame: realized in iron with three wheels and adjustable handle.
Engine: petrol engine 8.5-6 HP with self-winding pull start and centrifugal clutch.
Drive: drawing roller on the front wheel.
Compressor: twin-cylinder output air 490 l/min.
Pneumatic gun: with deflector in tungsten carbide and telescope for lines 12-30 cm.
Paint tank: 50 l with manual agitator incorporated, with certificate PED by laws CE.
Break: service brake on front wheel.
Solvent tank: 2,5 l to clean guns and pipes.

Accesories on demand:

Mechanical system for broken line
Group discs
Kit spread bead glasses 15 l
Kit spread bead glasses 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pneumatic pump
Manual bead gun
Pneumatic bead gun
Manual paint gun
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for operator

Self propelled machine for cold paint MVS 75 n

Hand-guided road marking machine, ideal for every type of cold paint (tank under pressure).

MEASURES:

Lenght: 1000 mm
Width: 750 mm (depending on the equipment)
Weight: 120 Kg-261.6 Lbs (depending on the equipment)

Frame: realized in iron with three wheels and adjustable handle.
Engine: petrol engine 8.5-6 HP with self-winding pull start and centrifugal clutch.
Compressor: twin-cylinder, output air 490 l/min.
Pneumatic gun: with deflector in tungsten carbide and telescope for lines 12-30 cm.
Paint tank: 50 l with manual agitator incorporated, with certificate PED by laws CE.
Break: service brake on front wheel.
Solvent tank: 2,5 l to clean guns and pipes.

Accessories on demand:

Mechanical system for broken line
Group discs
Kit spread bead glasses 15 l
Kit spread bead glasses 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pneumatic pump
Manual bead gun
Pneumatic bead gun
Manual paint gun
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for operator

Self propelled machine for cold paint MVS 150 ds

Road marking self-propelled machine with rear wheels drive, ideal for every type of cold paint (tank under pressure).

MEASURES:

Lenght: 1500 mm
Width: 750 mm (depending on the equipment)
Weight: 400 Kg - 981 Lbs (depending on the equipment)

Frame: realized in iron with three wheels and adjustable handle.
Engine: petrol engine 18 HP with self-winding pull start and centrifugal clutch.
Drive: hydraulic on rear wheels.
Compressor: twin-cylinder, output air 861 l/min.
Pneumatic gun: with deflector in tungsten carbide and telescope for lines 12-30 cm.
Paint tank: 100 l with manual agitator incorporated, with certificate PED by laws CE.
Front wheel: with revolving system and mechanical locking to correct the direction of the machine during the works in small places.
Break: service brake on rear wheels.
Solvent tank: 2,5 l to clean guns and pipes.

Accessories on demand :

Mechanical system for broken line
Group discs
Kit spread bead glasses 15 l
Kit spread bead glasses 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pneumatic pump
Manual bead gun
Pneumatic bead gun
Manual paint gun
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for operator
Programmer
Working light
Blitz

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint Kart Line MV 150

Road marking machine, self-propelled, 4 wheels with rear-wheel drive, for any type of paint (with under pressure tank).



MEASURES:

Length: 2100 mm
Width: 920 mm (depending on the equipment)
Weight: 450 Kg - 981 Lbs (depending on the equipment)

Frame: with four wheels articulated in the centre.
Engine: petrol 18-20-25 HP with electric ignition and centrifugal clutch (*).
Compressor: bicylindrical, two-stage air 860 l/min (*).
Drive: hydraulic, on rear wheels with pump of variable displacement.
Pneumatic gun: with deflector in tungsten carbide and telescope for lines 12 to 30 cm (**).
Paint Tank: 100 litres with manual agitator incorporated, with PED certificate by laws CE.
Brake: service brake on front wheels.
Solvent Tank: approximately 5 l to clean pipes, paint and gun.

Accessories on demand:

Mechanical drawer
Group discs
Kit spread beads glass 15 l
Kit spread beads glass 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pump for transfer
Manual bead spray gun
Pneumatic bead spray gun
Manual paint gun

Electronic drawer for broken lines
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for cones
Working light
Blitz

(*) engine-compressor set up of different typologies.
(**) assembling up to three guns for the paint and three pneumatic bead guns.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint Kart Line MV 170

Road marking, self-propelled machine with 4 wheels with rear-wheel drive, for any type of paint (with under pressure tank).



MEASURES:
Length: 2350 mm
Width: 1100 mm (depending on the equipment)
Weight: 870 Kg - 1896.6 Lbs (depending on the equipment)

Frame: with four wheels articulated in the centre.
Engine: petrol 25-40 HP with electric starting and centrifugal clutch (*).
Compressor: bicylindrical two-stage air 860 l/min (*).
Drive: hydraulic, on rear wheels with pump of variable displacement.
Pneumatic gun: with deflector in tungsten carbide complete with telescope for lines 12 to 30 cm (**).
Paint Tank: 170 litres with manual agitator incorporated with certificate PED by laws CE.
Brake: service brake on front wheels.
Solvent Tank: approximately 5 l to clean pipes, paint and guns.

Accessories on demand:

Mechanical system for broken lines
Group discs
Kit spread beads glass 15 l
Kit spread beads glass 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pump for transfer
Manual bead gun
Pneumatic bead gun
Manual paint gun

Electronic system for broken lines
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for cones
Working light
Blitz

(*) engine compressor set up of different typologies.
(**) assembling up to three guns for the paint and three pneumatic bead guns.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Self propelled machine for cold paint MVS 375

Road marking self-propelled machine, with 4 wheels and rear wheels drive, for every type of paint (with tank under pressure).

MEASURES:

Length: 2800 mm
Width: 1200 mm (depending on the equipment).
Weight: 780 Kg - 1700.4 Lbs (depending on the equipment).

Chassis: with four wheels, articulated.
Motor: petrol 40 HP with electric ignition and centrifugal clutch (*).
Compressor: bicylindrical, two-stage air 11100 l/min (*).
Drive: hydraulic, on rear wheels with pump of variable capacity.
Pneumatic spray gun: with baffle in tungsten carbide complete with telescope for lines 12 to 30 cm (**).
Paint Tank: 100 litres under pressure.
Pneumatic bead spray gun: with interchangeable nozzles.(**)
Paint Tank: 250 l with manual agitator incorporated with PED certificate in compliance with EC regulations.
Brake: parking brake on front wheels.
Solvent Tank: approximately 5 litres for washing pipes, paint and guns.

Accessories on demand:

Mechanical system for broken lines
Group discs
Kit spread bead glasses with tank of 15 l
Kit spread bead glasses with tank of 24 l
Ancillary tank for paint 15 l
Ancillary tank for paint 24 l
Pre-tracing arm
Pneumatic pump
Manual gun bead spray gun
Pneumatic bead spray gun
Manual gun for paint

Electronic drawer for broken lines
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for cones
Working light
Blitz

(*) compressor motor equipment of different types.
(**) assembly of up to three pistols for paint and three pneumatic beaders.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

universal self-propelled machine
MR-200-TH-P-PA

Road marking 4-wheeled self-propelled machine with rear drive and universal set up.

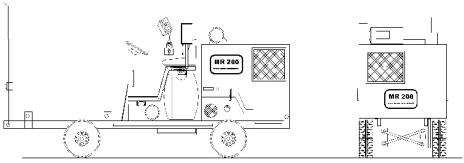

MEASURES:

Lenght: 3950 mm
Width: 970 mm
Weight: 1850 Kg 4070 Lbs (depending on equipment)

Chassis: 4-wheeled.
Motor: 30 HP petrol with electronic start and centrifugal friction (*).
Compressor: 1350 l per minute to 7 bar (*).
Drive: hydraulic type on rear drive with pump of variable capacity.
Beads glass tank 100 l under pressure.

Set up TH 1-2

Set up for thermoplastic (spray-screed-extrusion) made up of:
-tank for thermoplastic not under pressure of about 250 l
-hydraulic, rotating mixer clockwise and contra clockwise
-pumping system TerMac RMS model of Kg 50/m
-system of heating with gas burner
-circulating pump for diathermic oil, for tank heating
-possibility of installation closed extruder, screed box
-spraying group for no. 01 pneumatic gun for lines from 10 to 25 cm (**)

1

2


3

Set up P3

Set up for paint under pressure or airless
-paint tank 250 l under pressure with safety valves
-hydraulic, rotating mixer clockwise and contra clockwise
-spraying group for no. 01 pneumatic gun for lines from 10 to 25 cm (**)

Set up PA

Set up for airless paint
-paint tank 250 l in stainless steel
-hydraulic, rotating mixer clockwise and contra clockwise
-pumping group about 9 l (*)
-spraying group for no. 01 pneumatic gun for lines from 10 to 25 cm (**)

OPTIONALS
Carriage for airport works 50-90 cm
Electronic line-drawing
Manual gun for paints
Manual bead gun

(*) motor, compressor and pumps set up of different typologies.
(**) assembling up to 3 guns for the paint and 3 pneumatic bead guns.
(***) pumping on demand use machine.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

MR-200-TH-P-PA
self-propelled universal machine

Self-propelled road marking 4-wheeled machine with rear-wheel drive and with universal set up.

Operative aspect:

An ideal machine with work capacity both in autonomy and in excellent performance; the limited measures enable to operate in narrow streets where a common vehicle would have difficulty in passing.
The innovation, in the sector spray, has been applied by TerMac RMS , elaborating a pumping and eliminating the under pressure, being able **with the same equipment but without any alteration, to install spray, extrusion in pressure or screed box.** The speeds of application could be easily controlled by an hydraulic drive with a pump of variable capacity, assuring speed and constancy with the spray method and slow, constant gear in the case of an application with extrusion, where the speed is a very important element for the performance of the work.

Technical aspect:

Our technology has allowed us to develop a simply, versatile machine such as our equipments mounted on industrial vehicles are; the 40 years of experience has permitted us to introduce substantial innovations in the field of the spraying processing and heating of thermoplastic material.
That's why this machine has been created with a tank of about 200 l of thermoplastic with independent heating system, being able to carry out almost 3 tankfuls per day, without the aid of a pre-heater (that is 200 l x3 =960 kg per day).
Another important aspect is that with **MR, without any modification on the motor-compressor group that generate hydraulic air and power in HP, the following equipment could be applied:**

spray plastic	**1**
extrusion method a caduta	**2**
extrusion method with extruder in pressure	**3**
spraying of classic paint under pressure	**4**
spraying of paints with airless method	**5**
spraying of bi-component materials 1:1 airless	**6**

A wide range of optional is given with the complete supply of the machine such as systems for airport workings, systems for spreading in 2-components and still others.

MR Information:

diesel engine, cubic capacity of 1500, five-cylinders, water-cooled
compressor of 1350 l of air per minute at costant 7 bar
hydrostatic drive on rear-wheels for the clutch of various equipments **see points 1-2-3-4-5-6**
front mechanical steering for steering radius of about mt.8.0
diesel tank capacity of about 30 l
operator' s seat with control panel for the control of main MR machine functions
set up with a tank of 100 l for glass beads (under pressure)
possibility to have an hydraulic system for the steering system
hydraulic tank of about 35 l with heater and safety valves
BOX engine completely closed and preserved by rear overturing for maintenance

Safety information and MR manuals:

all our machines are equipped with:
machine user manual
spare parts manual
certificate of EC trademark
factory testing certificate with serial number
aluminium plate with EC trademark
aluminium plate with trademark rule machine

Data provided in the following document are for information only. TerMac reserves the right to modify such data.

MR 60 universal

Road marking machine self propelled

Road marking machine 4 wheels sel propelled universal

MEASURES:

Lenght: 5800 mm
Width: 1400 mm (ddepending of equipment)
Weight: 4500-6000 Kg 9900-13.200 Lbs

Frame: four-wheel with front hydraulic steering.
Engine: Diesel 80 CV 2400 rpm step 3 wather cooled
Compressor: sliding-vane compressor of 1300l/m-2600l/m' (*).
Drive: hydraulic on rear wheels with pump of variable displacement.
Speed of transfer: 25 Km/h
Beads tanks: no.02 circular capacity 150 l in pressure .
Diesel tank: litri 60
operatore site: no.02
Brake: service brake on rear wheels.
Engine compressor-group: completely soundproof and covered.
Controls panel: directly installed in correspondence of operator's seat.
Maximum accessibility to engine-compressor group with canopy's side openable doors.

MR 60 has been realized so as to be equip with a series of additional accessories, according to customers' demands; moreover it can be equipped with three different types of equipments:
EQP-PU (equipment with paint tank under pressure), EQP-PA (equipment for airless paint), EQP-PA2K (equipment for 2-component airless paints), EQP-TH (equipment for thermoplastic spray-extrusoin- screed)
There is furthermore the possibility, on demand,to equip the machine with EQP-PA + EQP-PA2K together or EQP-PU+EQP-TH, EQP-TH+EQP-PA, etc

The constricted measures of this self-propelled machine, allow to work in the middle of the street and the various equipments give the equipment the possibility to perform works also inside airports.

(*) depending of equipment

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

MR 60 universal

Road marking machine self propelled

- Versatile, self-propelled machine equipped with front steering system for a perfect manoeuvrability both in bend and in straight stretch, for a greater safety during the laying down of the roadsigns reducing the steering play.
- Hydrostatic drive system on rear wheels and hydraulic control, to guarantee very good speed and great power also at the highest slopes.
- Possibility of several set-up according to the workings required.

- Operator site composed of all general control
- no. 02 operator site
- no.02 spray group, one on the peft and one on the right, with hydraulic control translations and up-down penumatic system

Control panel

Tank EQP-TH

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

MR 60 universal

Road marking machine self propelled

Combinations of equipments that could be put on the machine:

EQP-PU (equipment with under pressure system) composed to:

paint tank iron with hydraulic mixer: 200x2, 400x2, 400+200, 250x2, 250+200, 400+250
no.03 pistole pneumatiche per linee da 10 a 30 cm (**)
no.03 pistole pneumatiche per microsfere di vetro con ugello intercambiabile (**)

EQP-PA (equipment with airless system) composed to:

paint tank inox with hydraulic mixer : 200x2, 400x2, 400+200, 250x2, 250+200, 400+250
no.03 pistole pneumatiche per linee da 10 a 30 cm (**)
no.03 pistole pneumatiche per microsfere di vetro con ugello intercambiabile (**)
range of hydraulic pump airless 12 to 32 lt/m at 150 bar max pressure (*)

EQP-PA2K (rquipment 2 components ratio 1:1airless system external mixing) composed by:

paint tank inox: 200x2, 250x2,300x2, 350x2, 400x2
no.09 pistole pneumatiche per linee da 10 a 30 cm (**)
no.06 pistole pneumatiche per microsfere di vetro con ugello intercambiabile (**)
range of hydraulic pump airless 12 to 32 lt/m at 150 bar max pressure (*)
series of box for screed or extrusion applications, 10 to 25 cm

EQP-TH (equipment for thermoplastc)composed by:
spray system (no pressure tank): thermoplastic pump modoel TerMac RMS
capacity 60 Kg/m
no.03 pneumatic guns (**)
tank capacity 200-300-500-800 litres not in pressure
extrusion system: can be applyed EX-25, EX-20, EX-15, EX-12, EX-10 on panthograph without dismount or change machine. Universal extruder with 8 pneumatic windows of 5 cm each, or extruder for drop-system.
Tank capacity 200-300-500-800 litres.
Heating system: gpl or diesel
Circulations system for diathermic oil: hydraulic pump
type of heating system: presurized boilr, tank chamber

(**) depending of customers requests
(*) depending of customers requests

MR 60 universal

Road marking machine self propelled

Accessories on demand:

Mechanical system for broken line
Disks group
Kit spread beads glass with tank of 15 l
Kit spread beads glass with tank of 24 l
Ancillary tank for paint per of 15 l
Ancillary tank for paint per of 24 l
Pre-tracing arm
Pump for transfer
Manual bead gun
Pneumatic bead gun
Manual gun

Electronic programmer
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for cones
Working light
Blitz
Panel 90x90 with rear rotating arrow
Panel 90x90 with illuminated right-left arrow

MR 40 universal

Road marking machine self propelled

Self-propelled, universal, road marking,4-wheeled machine.

MEASURES:

Lenght: 4000 mm
Width: 1200 mm (depending on the equipment)
Weight: 1800 Kg 3.960 Lbs (depending on the equipment)

Frame: four-wheel with central articulation.
Engine: 60 HP diesel 2400 rpm step 3 with electric starting, water-cooled.
Compressor: sliding-vane compressor of 1300l/min (*).
Drive: hydraulic on rear wheels with pump of variable displacement.
Speed of transfer: 25 Km/h
Glass beads tank: no.02 150 l under pressure.
Diesel oil tank: 60 l
Operator's seat: movable to the right or to the left, according to the work to be done.
Brake: service brake on front wheels.
Engine compressor-group: completely soundproof and covered.
Controls panel: directly installed in correspondence of operator's seat.
Maximum accessibility to engine-compressor group with canopy's side openable doors.

MR 40 has been realized so as to be equip with a series of additional accessories, according to customers' demands; moreover it can be equipped with three different types of equipments:
EQP-PU (equipment with paint tank under pressure), EQP-PA (equipment for airless paint), EQP-PA2K (equipment for bi-component airless paints).
There is furthermore the possibility, on demand,to equip the machine with EQP-PA ed EQP-PA2K together.

The constricted measures of this self-propelled machine, allow to work in the middle of the street and the various equipments give the machine the possibility to perform works also inside airports.

MR 40 universal

Road marking machine self propelled

- Versatile, self-propelled machine equipped with central articulation and with hydraulic mechanical system for a perfect manoeuvrability both in bend and in straight stretch, for a greater safety during the laying down of the roadsigns reducing the steering play.
- Hydrostatic drive system on rear wheels and hydraulic control, to guarantee very good speed and great power also at the highest slopes.
- Possibility of several set-up according to the workings required.

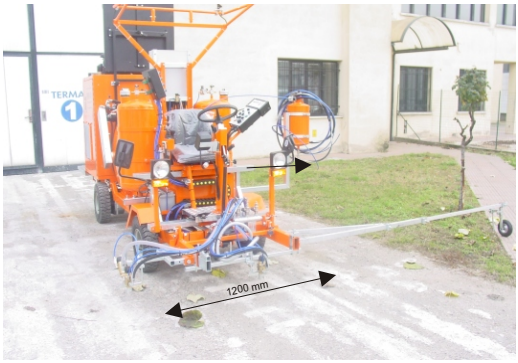

- Front driver's seat situated exact under the spraying group for a correct view on-the-job.
- Control panel available at the operator.
- Seat with controls, steering wheel and platform completely movable on the right and on the left, without carry out any mechanical alterations.
- Front spray group liftable of 90° to reduce machine obstruction during the fast movements.

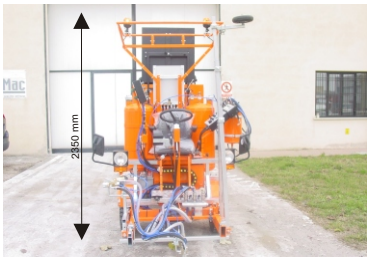

- Narrow measures, compact and highest visibility in each guide situation and for the operator's security.

- Movable platform for cones, panel with blitz for warning movable construction facilities.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

MR 40 universal

Road marking machine self propelled

Combinations of equipments that could be put on the machine:

EQP-PU (equipment with tank under pressure) made up of:

paint tank in pressure with capacity of 450 l with hydraulic agitator
no.02 pneumatic guns for lines from 10 to 30 cm (**)
no.02 pneumatic guns for beads glass with interchangeable nozzle (**)

EQP-PA (equipment for airless paint) made up of:

paint tank realized in iron with capacity of 450 l with hydraulic agitator
no.02 pneumatic guns for lines from 10 to 30 cm (**)
no.02 pneumatic guns for beads glass with interchangeable nozzle (**)
airless pump with hydraulic plunger capacity 12 l to about 150 bar

EQP-PA2K (equipment for bi-component airless paints with outer catalysis) made up of:

no.02 paint tanks realized in stainless steel with capacity of 250 l each one, with independent hydraulic agitators.
no.04 pneumatic guns for lines from 10 to 30 cm (**)
no.02 pneumatic guns for beads glass with interchangeable nozzle (**)
no.02 airless pumps with hydraulic plunger with capacity of 9 l to 150 bar

Accessories on demand:

Mechanical system for broken line
Disks group
Kit spread beads glass with tank of 15 l
Kit spread beads glass with tank of 24 l
Ancillary tank for paint per of 15 l
Ancillary tank for paint per of 24 l
Pre-tracing arm
Pump for transfer
Manual bead gun
Pneumatic bead gun
Manual gun

Electronic programmer
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for cones
Working light
Blitz
Panel 90x90 with rear rotating arrow
Panel 90x90 with illuminated right-left arrow

(*) engine-compressor set up of different typologies.
(**) assembling up to three guns for the paint and three pneumatic bead guns.

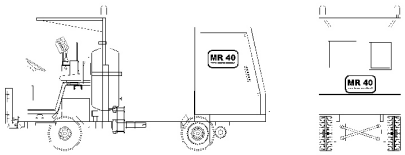

I dati forniti nel seguente documento sono a titolo informativo TerMac si riserva il dirtitto di poter modificare dali dti.

Self propelled machine for cold airless paint Kart Line MVA 150

Road marking, self-propelled machine, with 4 wheels and with rear-wheel drive, (airless system).

MEASURES:
Length: 2100 mm
Width: 900 mm (depending on the equipment)
Weight: 750 Kg - 1635 Lbs (depending on the equipment)

Frame: with four wheels articulated in the centre.
Engine: petrol 25 HP with electric starting and with centrifugal clutch (*).
Compressor: twin cylinder two-stage air 220 l/min (*).
Drive: hydraulic, on rear wheels with pump of variable displacement.
Pneumatic gun: for lines 12 to 30 cm (**).
Paint Tank: 150 l with manual agitator incorporated, with certificate PED by laws CE.
Brake: service brake on front wheels.
Paint pump: hydraulic, 9 l/min.

Accessories on demand:

Mechanical system for broken lines
Disks group
Kit spread beads glass 15 l
Kit spread beads glass 24 l
Ancillary tank 15 l
Ancillary tank 24 l
Pre-tracing arm
Pump for transfer
Manual bead gun
Pneumatic bead gun
Manual paint gun

Electronic system for broken lines
Gun support with wheel
Gun support with pneumatic wheel lift
Trolley for cones
Working light
Blitz

(*) engine-compressor set up of different typologies.
(**) assembling up to three guns for the paint and three pneumatic bead guns.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for cold paint airless
Series MVA (Truck-mounted equipment)

Equipments mounted on truck. Here are some of our best solutions for cold paint:

MVA 400 (tank realized in inox or plastic)

Paint tank 400 l x 1
Capacity beads glass 100 l x 1
Pneumatic gun no.03
Pneumatic bead gun no.03
Hydraulic pump per airless da circa 22 l/min at 130 bar
Available also platform version

Accessories on demand:
-rotary brush
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' request.

MVA 600 (tank realized in inox)

Paint capacity 300 l x 2
Beads glass capacity 100 l x 1
Pneumatic gun no.03
Pneumatic bead gun no.03
Hydraulic pump for airless of about 22 l/min to 130 bar

Accessories on demand:
-rotary brush
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' request.

Equipment for cold paint
MV Series (Equipment for truck)

Equipments truck-mounted. We show you the best versatile equipments for cold paint:

MV 400 (with tank under pressure)

Paint capacity 400 l x 1
Beads capacity 100 l x 1
Pneumatic paint gun no.03
Pneumatic bead gun no.03
It is possible to have platform version

On demand:
-rotary brush to clean roads
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' requests.

MV 600 (with tank under pressure)

Paint capacity 600 l x 01
Beads capacity 250 l x 01
Pneumatic paint gun no.03
Pneumatic bead gun no.03
It is possible to have platform version.

On demand:
-rotary brush to clean roads
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' requests.

MV 500/750 (with tank under pressure)

Paint capacity 250 l x 2-250 l x 1+400 l x 1
Beads capacity 300 l x 1
Pneumatic paint gun l no.03
Pneumatic bead gun no.03
It is possible to have platform version

On demand:
-rotary brush to clean roads
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' requests.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Equipment for cold paint
MV Series (Equipment for truck)

Equipments truck-mounted. We show you the best versatile equipments for cold paint:

MV 800 (with tank under pressure)

Paint capacity 400 l x 2
Beads capacity 250 l x 1
Pneumatic paint guns no.03
Pneumatic bead guns no.03
It is possible to have platform version

On demand:
-rotary brush to clean roads
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' requests.

MV 900 (with tank under pressure)

Paint capacity 400 l x 1 + 500 l x 1
Beads capacity 300 l x 1
Pneumatic paint guns no.03
Pneumatic bead guns no.03
It is possible to have platform version

On demand:
-rotary brush to clean roads
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' requests.

MV 1800 (with tank under pressure)

Paint capacity 400 l x 3
Beads capacity 400 l x 1
Pneumatic paint gunsno.03
Pneumatic bead guns no.03
It is possible to have platform version

On demand:
-rotary brush to clean roads
-trolley for cones
-pneumatic pump
Every equipment can be equipped according to customers' requests.

Self propelled airless machine for two-component material ratio 1:1 MVBA 70

Road marking machine with 4 wheels for airless paint ratio 1:1.

Termac presents the ideal machine for small works realized with two-component material 1:1. We all know the problems about treatment and spraying of such products, and that's why we've chosen the external catalysis together with mixing directly to the road surface by means of two airless pneumatic spray guns.

The handling of the two products, component **A** and component **B** is being made of two different airless pumps.

MVB-A-70 can be used for different combinations as follow:

A+B= two-component 1:1

Either A or B= in case of normal spraying use with mixed paint

A+B= in case of the same colour so as to have more paint capacity and autonomy

MEASURES:

Length: 2200 mm (without pointing device system)
Width: 950 mm (depending on the equipment)
Weigh: 300 kg 354 Lbs (depending on the equipment)

Frame: 4 wheeled realized totally in steel with steering front system.
Engine:18 HP gasoline with electric starting.
Compressor: electric, for machine's main functions control.
Drive: hydrostatic on rear wheels with variable capacity displacement.
Pneumatic spray gun: no.02 with self-cleaning nozzles for lines 12 to 50 cm.
Paint tank: no.02 60 l capacity made in plastic material, equipped with recycling pipe; the tank is also equipped with spray-proof screwing top.
Airless pump: no.02 hydraulic piston-pumps with maximum capacity of 9 l/min at approximately 130 bar oil pressure.
Control panel: in front with operator and controls by the steering-wheel.
Paint gun: no.02 pneumatic spray guns for **A** and **B** components from 10 to 25 cm width lines with self-cleaning nozzles.

Equipment on demand:

- electronic control on component **A** and **B** flow
- glass beads laying kit with under pressure system
- glass beads laying kit with roller bead
- manual guns kit for the realization of square metres

Accessories on demand:

- electronic system for broken lines mod. 115-350-00
- working light
- increased tank for paint
- place for inserting paint tank

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

MVB-07-50cm for cold plastic paint

Self propelled road marking machine with rear wheels drive, for cold plastic paint, drop or laminate execution.

MEASURES:

Length: 956 mm (depending on the equipment)
Width: 700 mm (depending on the equipment)
Weight: 150 Kg 327 Lbs (depending on the equipment)

Motor: 6 HP petrol, with pull start.
Frame: realized in steel with one single load bearing body, endowed with a rear axle with two wheels and a swivelling wheel in front that can be blocked mechanically.
Drive: on rear wheels, it can be *disconnected pneumatically* to move the machine quickly.
Bead gun group: consisting of a roller drop-fed by a bead dispenser with capacity of approx. 25 l
Furthermore the roller is connected to the rear drive axle with the possibility of rotation disconnecting.
Material laying group: on the right of the machine jutting out from the level of the machine frame, there is a tank to contain the material, with an adjustable pneumatic opening and rotating roller.
The tank and the roller can be dismountable to facilitate cleaning and maintenance operations.
Control panel: located on the handlebar close at operator's hand, endowed with:
handle to release the swivelling wheel, pneumatic manual valve to control tank opening and manual pneumatic valve to insert the drive.

Macchina per termoplastico colato
Machine for thermoplastic screed box
Ms-T100

Macchina traccialinee semovente per termoplastico.
Road marking machine for thermoplastic.

Motore idraulico per mescolatore
Hydraulic motor for mixer

Vaso d'espansione per olio diatermico
Expansion vessel for diathermic oil

Serbatoio l 100 non sotto pressione
Tank of l 100 not under pressure

Gruppo motore
Power plant

Sistema a pantografo per estrusore
Pantograph system for extruder

MISURE/MEASURES:

Altezza/height: 1226 mm
Larghezza/width: 1180 mm*
Lunghezza/lenght: 1760 mm
Peso: 350-380 Kg
weight: 765.5-832.2 Lbs

Dati tecnici/Technical data

Motore a benzina da 4.5-6.4 Kw raffreddato ad aria.
Gasoline engine of 4.5-6.4 Kw air-cooled.

Compressore 200 l/m a 7 bar monocilindrico.
Compressor 200 l/m at 7 bar single cylinder.

Trazione idraulica sulle ruote posteriori con pompa portata variabile.
Hydraulic rear drive with pump of variable displacement.

Capacità serbatoio l 100
Tank capacity l 100



Elettrovalvole pneumatiche per estrusore
Pneumatic electro-valves for extruder

Estrusore
Extruder

Ruota anteriore girevole bloccabile,
riscaldamento con olio diatermico,
valvola pneumatica per uscita plastica,
estrusore da 10 a 50 cm (a seconda dell'equipaggiamento),
sistema computerizzato per estrusore,
controllo elettronico della temperatura,
riscaldamento a gas,
plancia comandi anteriore completa di sistema stop motore di sicurezza.
(*) la misura della larghezza dipende dall'allestimento
Front and lockable revolving wheel,
heating with diathermic oil,
pneumatic valve for thermoplastic exit,
extruder from 10 up to 50 cm
(depending on the equipment),
computerized system for extruder,
electronic control of the temperature,
gas heating,
front control panel complete of security stop system engine.
(*) depending on the equipment.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Machine for thermoplastic screed box
Ms-T100

Screed box with under pressure pneumatic bead gun.

Application: line 10 cm and 3 mm of thikness.

115-002-100/110/120
Pistola pneumatica per vernice
Pneumatic gun for cold paint

Pistola modello TerMac RMS per vernici.

Paint spray gun TerMac RMS model for cold paint.

Ingresso per apertura-chiusura spillo
Air input for opening-closing pin

Ingresso aria per nebulizzare la vernice
Air entry for nebulization paint

Flangia di supporto pistola
Support flange for gun

Corpo pistola
Gun body

Ingresso vernice da 3/8 o ½ gas
Input for paint of 3/8 or ½ gas

Ghiera
Ring nut

① Cannocchiale
Definig

MISURE/MEASURES:

Altezza/height:	197 mm
Larghezza/width:	57 mm
Peso:	2.35 kg
weight:	5.14 Lbs

La pistola pneumatica modello TerMac RMS può essere installata su qualsiasi equipaggiamento per segnaletica stradale semovente o allestito su veicolo industriale e può essere utilizzata per qualsiasi tipo di vernice all'acqua o al solvente. Vi sono inoltre tre misure di ugelli: 4,6,9 mm.
TerMac RMS pneumatic spray gun can be installed on every equipments for roadsigns self-propelled or truck mounted and can be used for all types of solvent paint or acrylic paint. It is possible to have no.03 nozzles' measures: 4,6,9 mm.

Deflettore con palette in materiale antiusura widia.
Deflector with small shovels made in resistant material widia

①

Deflettore normale in metallo.
Normal deflector made in iron

115-002-150/240
Pistola manuale per vernice
Manual gun for cold paint

Pistola manuale normale o con prolunga modello TerMac RMS per vernici.

Paint manual spray gun TerMac RMS model normal or with extension for cold paint.

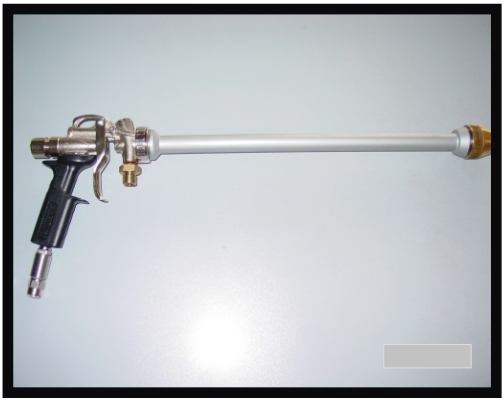

MISURE/MEASURES:

Altezza/height:	200 mm
Larghezza/width:	575 mm
Peso:	1.75 kg
weight:	3.83 Lbs

MISURE/MEASURES:

Altezza/height:	200 mm
Larghezza/width:	190 mm
Peso:	0.85 kg
weight:	1.86 Lbs

La pistola manuale modello TerMac RMS può essere installata su qualsiasi equipaggiamento per segnaletica stradale semovente o allestito su veicolo industriale e può essere utilizzata per qualsiasi tipo di vernice all'acqua o al solvente. TerMac RMS manual spray gun can be installed on every equipments for roadsigns self-propelled or truck mounted and can be used for all types of solvent paint or acrylic paint.

Ingresso aria per nebulizzare la vernice, tubo 8x10
Air input for paint to be nebulized, pipe 8x10

Ingresso vernice ½ o 3/8 gas
Paint entry ½ or 3/8 gas

115-002-151

Pistola manuale per vernice 2 componenti

Manual gun two components cold paint

Pistola manuale modello TerMac RMS per vernici a freddo 2 componenti.

Paint manual spray gun TerMac RMS model for cold paint two components.

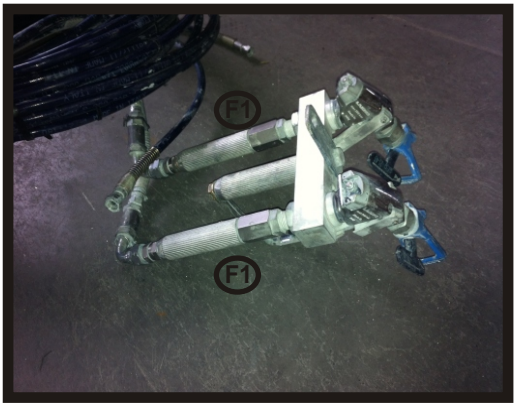

MISURE/MEASURES:

Altezza/height: 270 mm
Larghezza/width: 180 mm

La pistola manuale per due componenti realizzata da TerMac RMS, è composta da una camera doppia per l'arrivo del compo nente A e del componente B, la miscelazione dei materiali è esterna.
Maneggevole nell'uso e nella manutenzione, è realizzata in acciaio nella parte degli spruzzatori e completamente in alluminio nella parte inferiore.
Si possono montare n. Ugelli in funzione della capacità del pompante, ed è possibile installare no.02 filtri per vernice in ingresso vedi posizione F1.

The manual gun for two components produced by TerMac RMS, is composed of a double room for the arrival of the component A and the component B, the mixing of the materials is external.Manoeuvrable in use and maintenance, is made of steel in the part of the nozzles and completely inaluminum at the bottom.You can fit n. Nozzles according to the capacity of the pumping element, and it is possible to install No.02 filters for paintinput see location F1.

Filtri vernice/paint filter

Ugello auto-pulente/ nozzle self-cleaning

Ugello standard/ standard nozzle

115-170-020
Perlinatore pneumatico
Pneumatic bead gun

Perlinatore modello TerMac RMS sotto pressione per microsfere di vetro.

Bead gun TerMac RMS model under pressure for glass beads.

Ritardatore pneumatico per chiusura-apertura spillo
Pneumatic delay system for opening-closing pin

Raccordo per ingresso perline
Connection for glass beads entry

Corpo perlinatore
Bead gun body

① Diffusore intercambiabile con ghiera
Interchangeable spread with ring nute

MISURE/MEASURES:

Altezza/height:	205 mm
Larghezza/width:	125 mm
Peso:	1.80 kg
weight:	2.58 Lbs

Il perlinatore modello TerMac RMS può essere installato su qualsiasi equipaggiamento per segnaletica stradale semovente o allestito su veicolo industriale e può essere utilizzato per qualsiasi tipo di microsfera di vetro. Gli ugelli, di diametri differenti, sono intercambiabili.
TerMac RMS bead gun can be installed on every equipments for roadsigns self- propelled or truck mounted and can be used for all types of glass beads. It is to possible to have many interchangeable nozzles with different diameters.



①



115-170-040
Perlinatore R-A
Bead gun R-A

Perlinatore modello TerMac RMS non sotto pressione per prodotti granulari irregolari e polveri.

Bead gun TerMac RMS model not in pressure for granulars and irregulars products and powders.

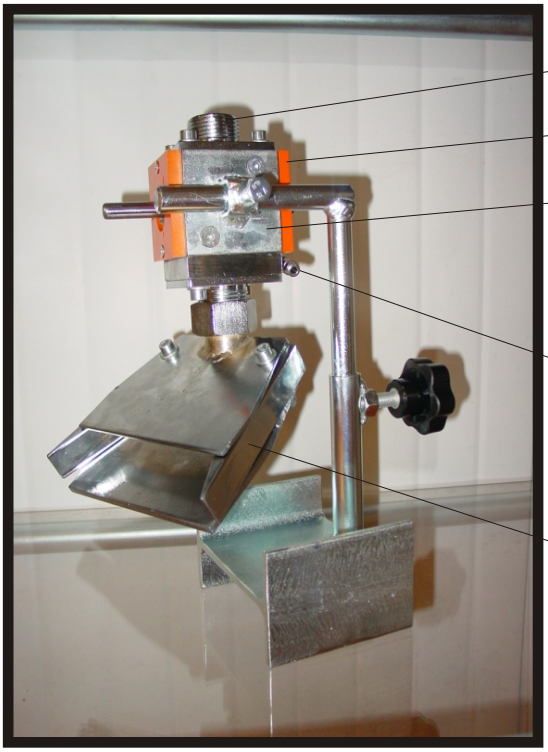

MISURE/MEASURES:

Altezza/height:	227 mm
Larghezza/width:	133 mm
Peso:	2.95 Kg
weight:	6.46 Lbs

Il perlinatore modello TerMac RMS può essere installato su qualsiasi equipaggiamento per segnaletica stradale semovente o allestito su veicolo industriale e può essere utilizzato per qualsiasi tipo di micosfera di vetro, indipendentemente dalla densità del materiale.
TerMac RMS bead gun can be installed on any equipments for roadsigns self-propelled or truck mounted and can be used for all types of glass beads, regardless of material density.



①



115-170-035

Perlinatore FOX
Bead gun FOX

Perlinatore modelo TerMac RMS

Bead gun TerMac RMS model.

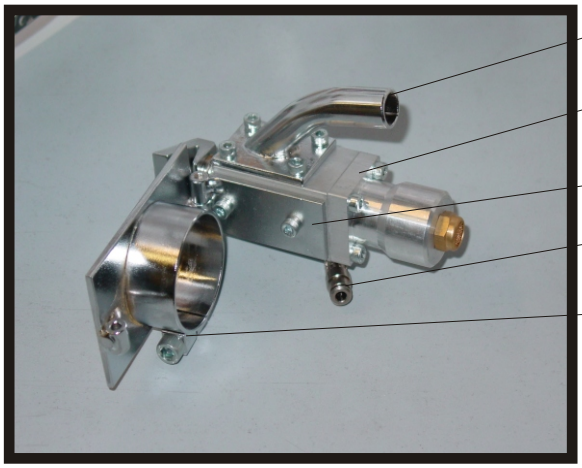

MISURE/MEASURES:

Altezza/height: 123 mm
Larghezza/width: 30 mm
Peso: 0.25 kg
weight: 0.54 Lbs

Il **perlinatore FOX** permette non solo l'inserimento delle microsfere di vetro nella vernice durante la spruzzatura con la pistola manuale, ma anche la stesura delle sfere di vetro in contemporanea alla vernice, con un semplice gesto sulla flangia di ancoraggio, correggendo il raggio di inclinazione del **perlinatore FOX.** Questo sistema si è reso utile sia per l'applicazione di vernice bicomponente (microsfere catalizzate) che per la realizzazione dei metri quadri.
The **Fox beader** enables not only the input of glass beads into the paint during spraying with manual gun but also the spreading of beads glass at the same time as the paint, with a simple action on the anchoring flange, correcting the radius of inclination of the **Fox beader**. This system has become useful both for the application of bi- components paint (catalysed beads glass) and for the realization of square metres.

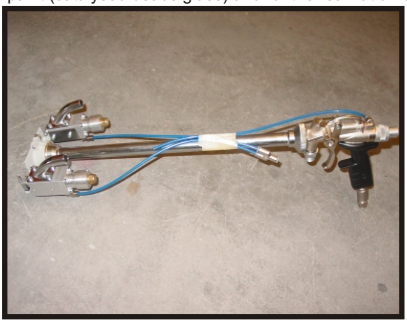

Doppio sistema FOX su pistola manuale con prolunga.
Double FOX system on manual paint gun with extension.

115-350-000
Programmatore Vuoto-Pieno
Programmer Empty-Full

Cervello elettronico per l'esecuzione della segnaletica stradale con sistema computerizzato.

Electronic brain for roadsigns execution with computerized system.

Schermo
Screen

Tasti funzioni programmazione
Programming function keys

Tasti per funzione tracciatura
Marking function keys

MISURE/MEASURES:

Altezza/height: 220 mm
Larghezza/width: 140 mm
Peso: 0.75 kg
weight: 1.64 Lbs

Sistema computerizzato che permette l'esecuzione delle strisce secondo le misure previste dal codice della strada, con nove misure memorizzate, con la possibilità di passare da un modulo all'altro senza dover arrestare il veicolo. Vi è la possibilità di conoscere: la velocità del veicolo, i metri lineari effettivamente percorsi durante la giornata lavorativa e i Km complessivi fatti dall'automezzo a lavoro terminato. Inoltre vi è la possibilità di correggere le misure impostate.

Computerized system for the execution of lines according to the measures provided by the highway-code with nine memorized measures with the possibility of shifting from one module to the another without having to stop the vehicle. There is the possibility of knowing: the vehicle speed, the linear meters actually covered during a working day and the overall kilometres covered by the motor vehicle at the end of the working day. There is, furthermore, the possibility of adjusting the set up measures.

Funzione di ripasso
Return function



Linea B programmata dal computer
Linea A decisa dall'uetente
Line B programmed by the computer
Line A decided by the user

Funzione di nuovo
New function

Linea B programmata dal computer
Linea A programmata dal computer
Line B programmed by the computer
Line A programmed by the computer

Il programmatore V-P modello TerMac può essere installato su qualsiasi equipaggiamento per segnaletica stradale, semovente o allestito su veicolo infdustriale.

The programmer E-F TerMac model can be installed on every equipment for roadsigns, self-propelled or truck-mounted.

115-170-040 Thermoplastic Extruder Ex-25

Extruder TerMac model for thermoplastic material to realize bars and lines.

Application of EX-25 on the pantograph of a spray plastic truck series MT without modifying the old system

The size of the bar and the wheelbase between one bar and the other, can be perfectly controlled thanks to the electronic system with whom the models MT are already equipped, without the need of any electronic modification.

The EX-25 Extruder is the news from TerMac RMS for the creation of bars in thermoplastic material. It is an absolute innovation characterised by the simplicity with which the equipment can be assembled and anchored to the spray group, by means of a simple clutch of the tube connecting the spray guns. Without the need to modify any part of the equipment, it can be installed on all the machines and it does not require pressurized systems nor a specific recirculation system inside the plastic chambers. It is totally heated by means of a diathermic oil circuit and has a plastic block valve that insulates the extruder when maintenance is required and guarantees a constant amount of material even when there are changes in the execution speed of the bars. Made in wearproof material it also has, on the lower part, two adjustable blades to guarantee the perfect closure of the blade, keeping the perfect shape of the bar without any loss of material during laying, even over time. TerMac makes extruders in various sizes: 10,12,15,20,25,30 cm as well as a wide range of modular extruders.

Films and technical specifications are available on TerMac website.
The EX-25 represents an innovation in the field of extrusion, its strong point is the absence of modification and the guarantee of a continuous laying down of the material.
Just to think the use of a MT 150 with the possibility of a continuous supply during application, that is to say more than 1500 kg of material extruded during a working day with an application's speed from 2 to 4 km/h.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

TerMac
Road Marking Solutions

The best solutions for truck mounted equipments

Platform for industrial truck

Platform MV 400 on truck Piaggio Porter maxi:
- paint tank about 400 litres with hydraulic agitator
- beads glass tank about 100 litres
- no.02 hydraulic pantographs on the right and on the left
- no.03 pneumatic guns for paint
- no.03 pneumatic bead guns
- platform for cones
- hydraulic brush to clean the roads
- law CE and double driver tested

Platform MV 400 on truck ISUZU and NISSAN:
- paint tank about 400 litres with hudraulic agitator
- beads glass tank about 250 litres
- no.02 hydraulic pantographs on the right and on the left
- no.03 pneumatic guns for paint
- no.03 pneumatic bead guns
- platform for cones
- hydraulic brush to clean the roads
- law CE and double driver tested

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Accessories for all equipments

Pneumatic and manual gun for cold paint low pressure

Pneumatic paint spray gun TerMac mode for low pressure.
Cod.115-002-100 nozzle 4 mm
Cod.115-002-110 nozzle 6 mm
Cod.115-002-120 nozzle 9 mm

CE declaration

Manual paint spray gun TerMac mode for low pressure.
Cod.115-002-150 nozzle 3.8 mm

CE declaration

Manual paint spray gun with extension TerMac mode for low pressure.
Cod.115-002-240 nozzle 3.8 mm

CE declaration

Accessories for all equipments

Manual gun for cold paint for two components applications, airless system

Manual gun for cold paint
two components applications ariless system
Cod.115-002-151 nozzle interchangeable.

CE declaration

Accessories for all equipments

Pneumatic and manual gun for glass beads

Pneumatic paint gun for glass beads .
Cod.115-170-020
with interchangeable nozzle from 3 to 10 mm

CE declaration

Manual gun for glass beads with extension.
Cod.115-002-240 nozzle 3.8 mm

CE declaration

Manual gun for glass beads.
Cod.115-170-035
with interchangeable nozzle from 2 to 4.8 mm

CE declaration

Accessories for all equipments

Pneumatic gun for thermoplastic spray

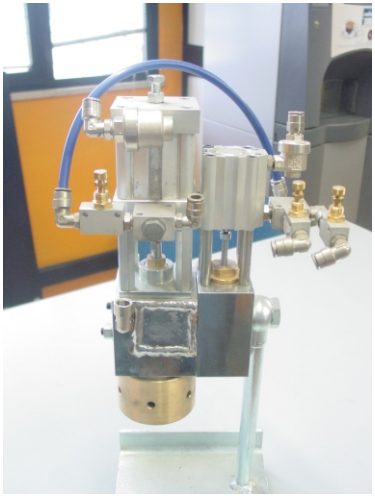

Pneumatic gun with air valve for thermoplastic spray
Cod.115-170-020
with interchangeable nozzle from 8 to 19 mm
heating system with diathermic oil
deflector in widia
can be mounted on equipment for truck and on self probelled machine, with pressure tank or screw pump

CE declaration

Roller for glass beads

Roller for glass beads fro 10-12-15 20-22-25-50 cm to apply on self propelled machine and truck mounted equipments

Manual roller for glass beads 50 cm

Accessories for all equipments

Under pressure tank for glass beads:
15-24-50-100-170-250-350-700 l

Under pressure tank for paint:
15-24-50-100-170-250-40 l

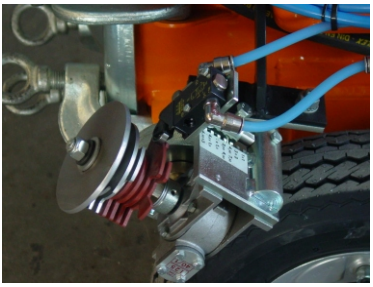

System for broken line

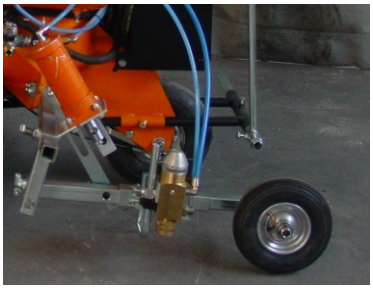

Spray group with pneumatic cylinder
single effect

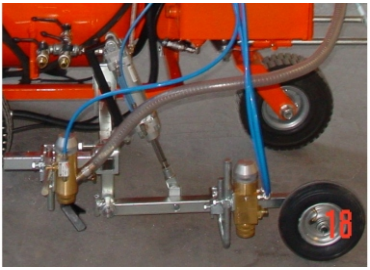

Spray group with pneumatic cylinder
double effect

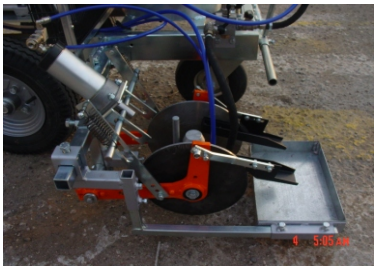

Discs group

Accessories for all equipments

Arm with extension for pre-marking or spray

Trolley for operator

Pneumatic pump

Rear panel with flash

Boot for thermoplastic screed: 10-12-15 20-22-25-50 cm

Hydraulic brush for truck or self propelled machine

Preriscaldatori per materiale termoplastico
Preheaters for thermoplastic material

Serie preriscaldatori/ preheater series:

PR 200 litri 126 su piattaforma/on platform (*) (**) (***) C P M mescolatore idraulico/hydraulic agitator

PR 700 litri 437 su piattaforma/on platform (*) (**) (***) C P M mescolatore idraulico/hydraulic agitator

PR 1500 litri 937 su piattaforma/on platform (*) C P M mescolatore idraulico/hydraulic agitator

PR 3000 litri 1875 su piattaforma/on platform (*) C P M mescolatore idraulico/hydraulic agitator

PR 6000 2 x 1875 su piattaforma/on platform (*) C P M mescolatore idraulico/hydraulic agitator

PR 9000 3x1875 su piattaforma/on platform (*) C P M mescolatore idraulico/hydraulic agitator

On request:

(*) mescolatore riscaldato con circuito olio diatermico/agitator heated by diathermic oil circuit

(**) sistema di riscaldamento con bruciatore a gasolio/heating system with diesel burner

(***) sistema di riscaldamento con bruciatore a gas/heating system with gas burner

C caldaia pressurizzata con bruciatore a gasolio/pressurized boiler with diesel burner

P circolazione olio diatermico con pompa idraulica/circulation diathermic oil with hydraulic pump

M pompa idraulica con braccio per materiale/ hydraulic pump with arm for material

Realizzazione preriscaldatori su richiesta/ It is possible to realize preheaters on request.

TerMac Road Marking Solutions Web site: www.termac.it, contatto@termac.it,

Line of made to order accessories and special equipments



- Paint filters TerMac model for airless system or under pressure.

- Pipes for glass beads and paints with airless or under pressure system.



- Preparation and installation of mixing system for paint tanks or bituminous materials.



- Preparation and istallation of all types of control panels in anodized aluminium.

- All types of alphanumerical galvanized sheet iron templates and symbols in any shape, are realized with laser cutting.



- Production and installation of revolving joints for paints or bituminous materials.
- Roller glass bead system for use in airports or of large-sized.
- Installation of painting circuits and circuits for glass beads.
- Treatment system (mixing and spreading) for hot paints or bituminous materiasl.
- INSTALLATION AND MANUFACTURE OF STREET CLEANING SYSTEM.
- Supply of hydraulic, pneumatic and oleodynamic components.
- SUPPLY AND INSTALLATION OF OLEODYNAMIC CIRCUITS FOR DIFFERENT FUNCTIONS.

TerMac Road Marking Solutions

web www.termac.it
E-mail contatto@termac.it

TerMac Road Marking Solutions Equipments
Termacrms
Termacmacchine

Distributed by: